Count drawing's modified record with customer

VER.	DESCRIPTION	DATE
#1	THE FIRST ISSUE	2007-05-05
#2	Change module / LCD number	2007-05-29

*符合ROHS要求

PIN ASSIGNMENT

NO.	SIGNAL
1	NC
2	PS0
3	PS1
4	PS2
5	PS3
6	RESET
7	VSYNC
8	HSYNC
9	DOTCLK
10	ENABLE
11	DB17
12	DB16
13	DB15
14	DB14
15	DB13
16	DB12
17	DB11
18	DB10
19	DB9
20	DB8
21	DB7
22	DB6
23	DB5
24	DB4
25	DB3
26	DB2
27	DB1
28	DB0
29	RD
30	WR
31	DC
32	CS
33	VSS
34	VCC
35	K
36	A

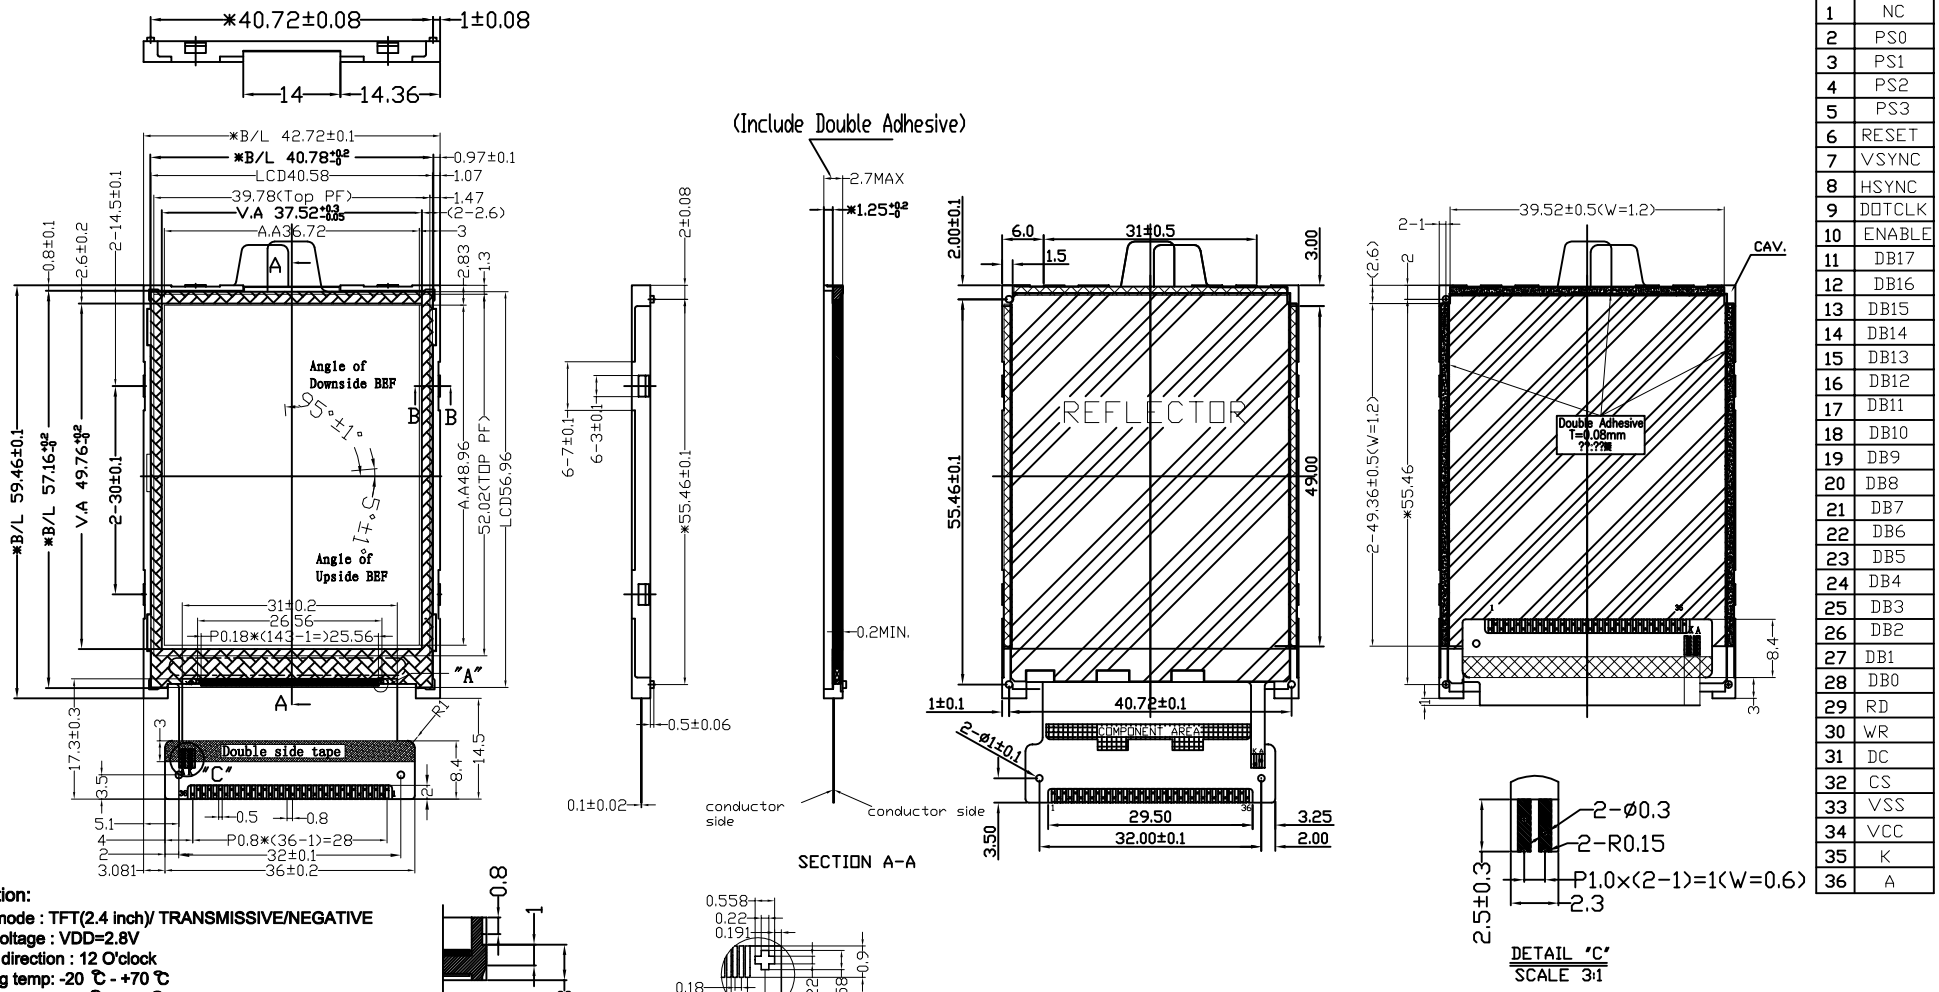

Specification:

1. Display mode : TFT(2.4 inch)/ TRANSMISSIVE/NEGATIVE
2. Driving voltage : VDD=2.8V
3. Vieiwing direction : 12 O'clock
4. Operating temp: -20 ℃ - +70 ℃
   Storage temp : -30 ℃ - +80 ℃
5. Interface:80 PARALLEL
6. BackLight : White
7. Unmarked tolerance : ±0.2mm
8. ROHS request:YES

ITEM		ELECTRICAL & PHYSICAL DATA
LED		3pcs
Luminous		2900cd/m^2 ~ 4100cd/m^2
Uniformity		80% MIN. (???)
C.I.E	X	0.260~0.300
	Y	0.260~0.300
Supply Current		20mA(fixed)
Supply Voltage		9.0V~10.2V

A·MAX	MODULE NO.	EDG024A01TOXGC			LCD No.	AMX-2502-AOCM
					Customer No.	2.4 " TFT 36PIN
	DESIGNED	CHECKED	VERIFIED	APPROVED	FILE NAME	
UNIT: mm / SIZE: A4 / SCALE: FIT	朱志辉	黄忠忠	杨丽	韩军建	Count Drawing	
	2007/05/29	2007/05/29	2007/05/29	2007/05/29		