

Count drawing&Spec revision record during discussion with customer




VER	Revision content description	Date
#1	First ISSUE	2007/07/28
#2	Add Back light. del. Add FPC Component item dimension.	2007/10/06
#3	Change FPC total thickness,Change FPC Component area dimension.	2007/11/14
#4	Add Spray code	2007/11-28

NO.	SIGNAL
1	GND
2	R5
3	R4
4	R3
5	R2
6	R1
7	R0
8	G4
9	G3
10	G2
11	G1
12	G0
13	G0
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	CS
21	S01
22	SCL
23	DOTCLK
24	RESET
25	VCC
26	VCC
27	HSYNC
28	VSYNC
29	IE
30	GND
31	NC
32	NC
33	NC
34	NC
35	NC
36	NC
37	NC
38	NC
39	GND

1/2 C/N PIN MAP

**Specification:**

1. Display mode: TFT(2.41 inch)/ TRANSMISSIVE/NEGATIVE,VDD=2.8V
2. Viewing angle: 12 O'Clock
3. Operating temp: -20° C--+70° C
4. Drive IC: R61505U
5. Unspecified tolerance is ± 0.2mm
6. Backlight Color: White( 4 LEDs);V: ■12V;I: ■8mA ;
7. ROHS request

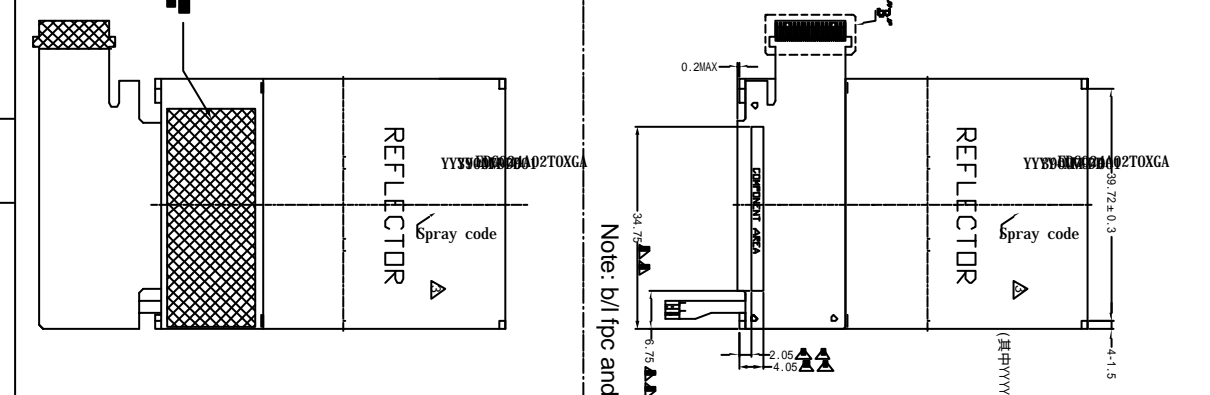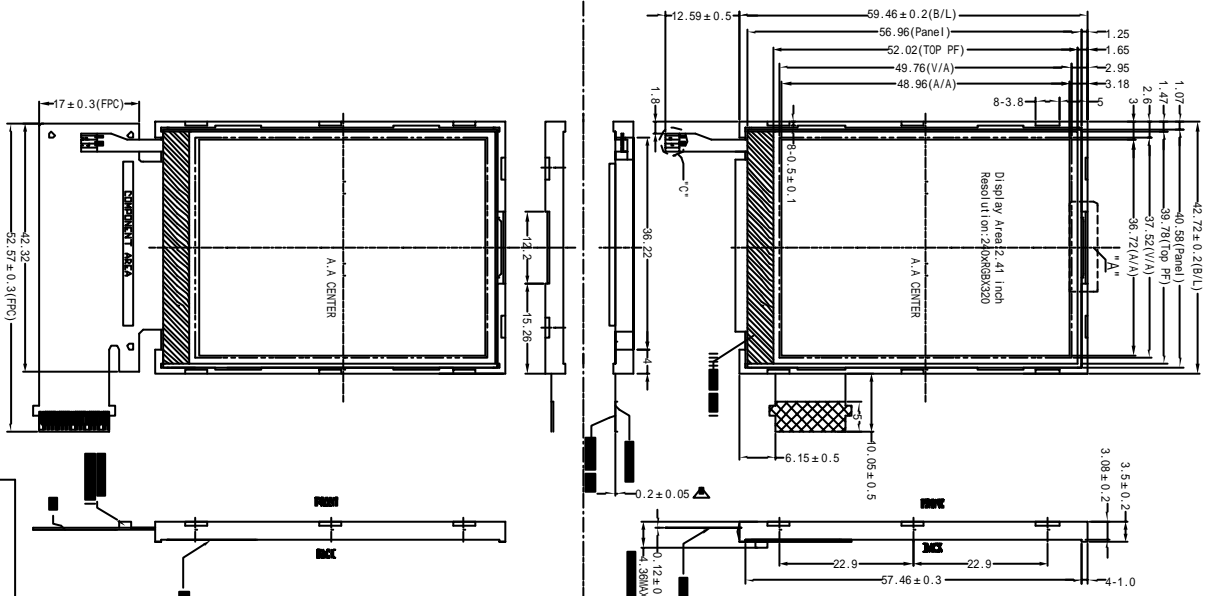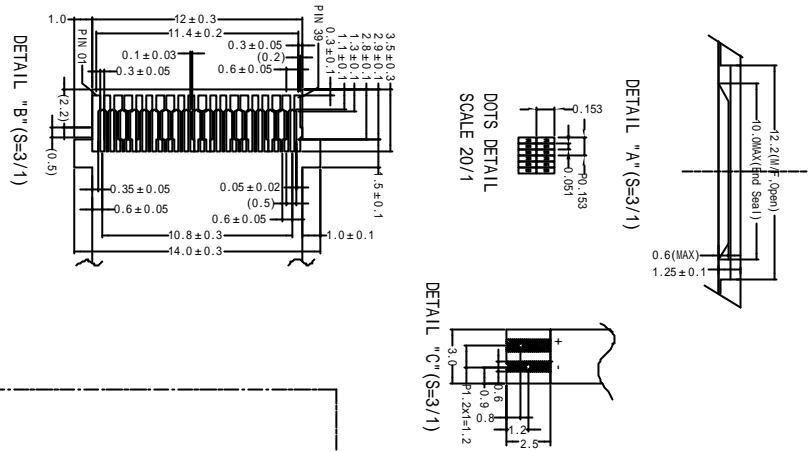

Note: b/l fpc and lcd fpc is separate flex

FINISHED PRODUCT DRAWING

(其中YYYY-MM-DD代表生产日期)

OUTSPREAD DRAWING

		UNIT	SIZE	SCALE	DESIGNED	CHECKED	VERIFIED	APPROVED	LCD No.	AMX-2502-AOCM
		mm	A4	FT	May	杨蔚	黄忠忠	韩奎建	Customer No.	2.4" TFT 39PIN
					FILE NAME	Count Drawing				

MODULE NO. EDG024A02TOXGA

REFLECTOR

Spray code

YY300000002TOXGA