
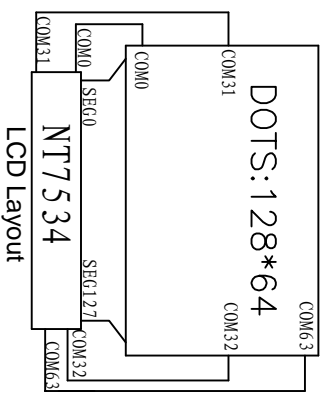



1	VSS
2	VDD
3	VO
4	/RES
5	/CS
6	RS
7	/WR
8	/RO
9	D0
10	D1
11	D2
12	D3
13	D4
14	D5
15	D6
16	D7
17	A
18	K



- Specification:
1. Display mode : FSTN/Black-White/POSITIVE/transflective
 2. Driving mode : 1/65 duty, 1/9bias, Vlcd=10.0V, VDD=3.0V
 3. Viewing direction : 6 O'clock
Storage temp.: -20° C~+70° C
 4. Operating temp.: -20° C~+70° C
 5. Connector : FFC
 6. Drive IC : NT7534
 7. Back Light : 16 Y-G LEDs (voltage=4.2V, current=80mA)
 8. Unmarked tolerance : ± 0.3
 9. ROHS Request

1.0	First issue	2006-04-0
1.1	Add black tape	2006-10-2
1.2	Change the dimension	2006-10-2
1.3	Change the UV Silicon	2006-12-21
1.4	Change BL LCD outline size tolerance	2007-05-23
	Add BL tolerance	2007-04-9

UNIT	SIZE	SCALE	DESIGNED	CHECKED	VERIFIED	APPROVED	MODULE NO.	EDG128BK3WXMGA	LCD No.	AMX-2346-AFCT
mm	A4	FIT	钟日枚	杨丽	杨丽	韩军建			Customer No.	390050-001
								FILE NAME	OUTLINE	